



PORCELAIN TILES

Doston

geotiles
cerámica

Arena

Blanco

Perla

Marengo



Porcelain tile
Porcelánico



Natural Rectified
Natural Rectificado



Semipolished surface
Superficie Semipulido



Matt surface
Superficie Mate



Hygienic and Anti-Allergenic
Higiénico y antialérgico



Fireproof
Ignífugo



Durable and resistant
Duradero y resistente



UV Resistant
Resistente a los rayos UVA



Easy maintenance
Fácil mantenimiento



Responsible
Responsable



High Shade Variation
Destonificado



THE SECRETARY OF STATE HAS A SECRET HISTORY OF BORN LEAVING, YOU BELIEVED BY THE STONE AGE
THAT YOU WERE THE ONLY ONE WHO COULD SAVE THE WORLD
I GO WITH THE FLOW
LIVING THROUGH CHEMISTRY
LOST ART OF KEEPING A SECRET
LE SISTER, THE CLOCKWORK
I APPEAR MISSING
AUTO PILOT
NO ONE KNOWS
QUEENS OF THE STONE AGE
FEEL GOOD HIT OF THE SUMMER
EVERYBODY KNOWS THAT YOU ARE HEAVEN MY GOD IS THE SUN
YOUR CAN'T BE THE ONLY

DALSTON ARENA

90x180/36"x72"



DALSTON BLANCO

120x120/48"x48"

DALSTON BLANCO

PORCELAIN TILES

Sizes / Formatos



Dalston Blanco
90x180/36"x72"
Natural Rectified - Lappato Rectified



Dalston Blanco
90x90/36"x36"
Natural Rectified - Lappato Rectified



Dalston Blanco
60x120/24"x48"
Natural Rectified - Lappato Rectified



Dalston Blanco
60,8x60,8/24"x24"
Natural



Dalston Blanco
60x60/24"x24"
Natural Rectified - Lappato Rectified



Dalston Blanco
120x120/48"x48"
Natural Rectified - Lappato Rectified



Malla Dalston Blanco
30x30(5x5)/
12"x12"(2"x2")



Dalston Blanco
30x60/12"x24"
Natural Rectified - Lappato Rectified





DALSTON Perla

90x180/36"x72"

DALSTON PERLA

PORCELAIN TILES

Sizes / Formatos



Dalston Perla
90x180/36"x72"
Natural Rectified - Lappato Rectified



Dalston Perla
90x90/36"x36"
Natural Rectified - Lappato Rectified



Dalston Perla
60x120/24"x48"
Natural Rectified - Lappato Rectified



Dalston Perla
60,8x60,8/24"x24"
Natural



Dalston Perla
60x60/24"x24"
Natural Rectified - Lappato Rectified



Dalston Perla
120x120/48"x48"
Natural Rectified - Lappato Rectified



Malla Dalston Perla
30x30(5x5)/
12"x12"(2"x2")



Dalston Perla
30x60/12"x24"
Natural Rectified - Lappato Rectified





DALSTON Marengo

120x120/48"x48"

DALSTON MARENGO

PORCELAIN TILES

Sizes / Formatos



Dalston Marengo
90x180/36"x72"
Natural Rectified - Lappato Rectified



Dalston Marengo
90x90/36"x36"
Natural Rectified - Lappato Rectified




Dalston Marengo
60x120/24"x48"
Natural Rectified - Lappato Rectified



Dalston Marengo
60,8x60,8/24"x24"
Natural



Dalston Marengo
60x60/24"x24"
Natural Rectified - Lappato Rectified




Dalston Marengo
120x120/48"x48"
Natural Rectified - Lappato Rectified



Malla Dalston Marengo
30x30(5x5)/
12"x12"(2"x2")



Dalston Marengo
30x60/12"x24"
Natural Rectified - Lappato Rectified

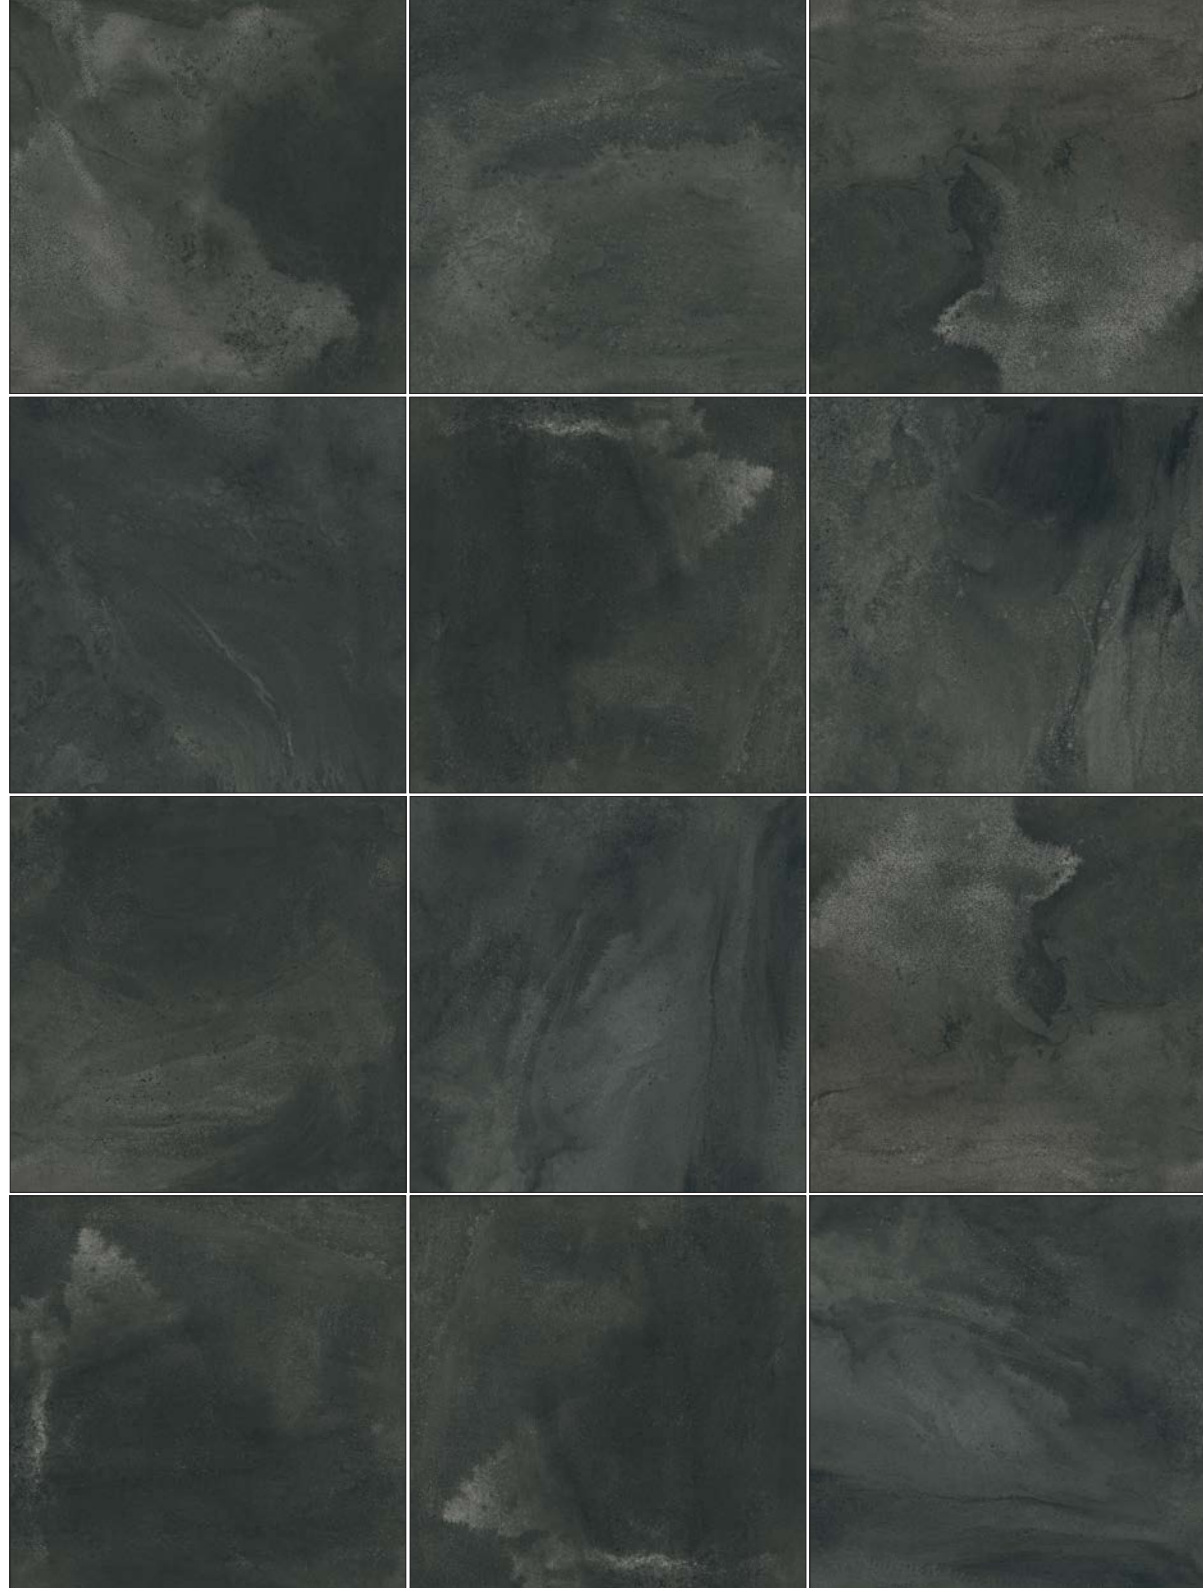

SPECIAL PIECES / PIEZAS ESPECIALES

Special angle / Ángulo gradone recto



Special step / Peldaño gradone recto




Step / Peldaño romo



Angle / Ángulo romo



Skirting / Rodapié romo

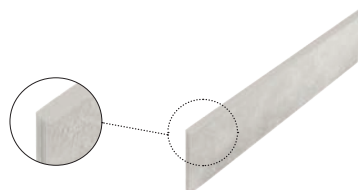










Packing List










Packing List	Pcs/Box Pz/Caja	Sqm/Box m ² /Caja	Boxes/Pallet Cajas/Palet	Sqm/Pallet m ² /Palet	Kg/Box Kg/Caja	Kg/Pallet Kg/Palet
90x180	1	1,62	24	38,88	42,71	1.085
120x120	1	1,44	36	51,84	38,40	1.422,4
60x120	2	1,44	32	46,08	34,00	1.113
90x90	2	1,62	27	43,74	41,30	1.145
60,8x60,8	4	1,48	30	44,40	31,00	950
60x60	4	1,44	30	43,20	30,00	920
30x60	6	1,08	48	51,84	22,35	1.093

TECHNICAL FEATURES / CARACTERÍSTICAS TÉCNICAS

Porcelain Tiles / Porcelánico

									
STANDARD NORMES NORMAS DE ENSAYO	ISO 10545-2	ISO 10545-3	ISO 10545-4	ISO 10545-6	ISO 10545-9	ISO 10545-12	ISO 10545-13	ISO 10545-14	DIN 51130 DIN 51097 UNE-ENV 12633 ASTM C 1028
VALUE REQUIRED BY EN 14411 STANDARD VALORES PRESCRITOS NORMA EN 14411		< 0,5%	> 35 N/mm ² > 1300 N	Máx.175 mm ³	Test method available Método de ensayo disponible	Test method available Método de ensayo disponible	Test method available Método de ensayo disponible	Test method available Método de ensayo disponible	R Rating Clase
AVERAGE VALUE VALOR MEDIO	Conforms to Standard Cumple la norma	0,1%	35-45 N/mm ² 1800-2500 N	110-130 mm ³	Resists Resiste	Resists Resiste	Conforms to Standard Cumple la norma	Conforms to Standard Cumple la norma	According to models Según modelos

Group Bla (gl) Water Absorption <0.5% / Grupo Bla (gl) Absorción de Agua <0.5%

 Dimensional Features Características dimensionales	 Water absorption Absorción de agua	 Modulus of rupture Resistencia a la flexión	 Resistance to deep abrasion (mm ³) Resistencia a la abrasión profunda (mm ³)
 Thermal shock resistance Resistencia al choque térmico	 Frost resistance Resistencia a la helada	 Chemical resistance Resistencia química Ácidos y bases	Cleaning products and pool reactive agents Productos de limpieza y reactivos de piscinas
 Resistance to stains Resistencia a las manchas	 Slip Resistance Resistencia al deslizamiento		

GEOTILES reserves the right to modify the packing of any product reference.
GEOTILES se reserva el derecho a modificar el packing (en relación al espesor de la pieza).

Geotiles, S.L.U. operates a policy of continuous development and reserves the right to make changes to its products, colours, engineering specifications, packaging codes without prior notice. Geotiles has taken every effort to ensure that the information contained in the catalogue is correct at the time of publication. Due to the limitations of the printing process, the colours reproduced may vary slightly from the original product.

Geotiles, S.L.U. aplica una política de continuo desarrollo de sus productos y se reserva el derecho a realizar cambios en los productos, colores, especificaciones técnicas y códigos sin previo aviso. Geotiles ha realizado un esfuerzo considerable para que toda la información sea adecuada en el momento de la publicación del catálogo. A causa de las limitaciones del proceso de impresión los colores reproducidos pueden sufrir ligeras variaciones con respecto al producto original.



GEOTILES S.L.U. complies with all the obligations derived from the CE marking for its products defined by the European community according to the EN ISO 14411 standard. GEOTILES S.L.U. cumple todas las obligaciones derivadas del marcado CE para sus productos definidos por la comunidad europea acorde a la norma EN ISO 14411.



The UKCA (United Kingdom Conformity Assessed Mark) is the new UK product marking that will be required for certain products that are marketed in Great Britain (England, Wales and Scotland).

El marcado UKCA (conformidad Evaluada del Reino Unido, por sus siglas en inglés) en la nueva marca del producto del Reino Unido que se requerirá para ciertos productos que se comercializan en Gran Bretaña (Inglaterra, Gales y Escocia).



The CCC certificate (China Compulsory Certificate) is applied to products for export or production in that territory. Concerns both health and safety related to ceramic tiles. The certificate is obtained through the institutes expressly accredited by the Chinese authorities. El certificado CCC (China Compulsory Certificate), se aplica a los productos para exportar o producir en China. Conciernen tanto a la seguridad como a la salud relacionado con las baldosas cerámicas. Esta certificación la acreditan institutos autorizados por las autoridades chinas.



GEOTILES has implemented a quality management system, in accordance with the ISO 9001 standard, certified by Lloyds Register Quality Assurance. Committed to excellence in management and understanding quality as its hallmark, the keys to compliance with this standard are:

- Improve customer satisfaction.
- To increase employee commitment to quality.
- To optimise the operation of the business units and the marketing service.
- Commitment to continuous improvement as the key to business success.

GEOTILES tiene implantado un sistema de gestión de calidad, acorde con la norma ISO 9001, certificado por Lloyds Register Quality Assurance. Apostando por la excelencia en la gestión y entendiendo la calidad como su seña de identidad, las claves en el cumplimiento de esta normativa son:

- Mejorar las satisfacción de los clientes.
- Incrementar el compromiso de los empleados con la calidad.
- Optimizar el funcionamiento de las unidades de negocio y el servicio de comercialización.
- Apostar por la mejora continua como clave del éxito empresarial.



Certification defining the conformity and technical characteristics of our product in the SASO USO 13006/20188 for export to Saudi Arabia.

Certificación que define la conformidad y características técnicas de nuestros productos en la SASO USO 13006/2018 en su exportación a Arabia Saudí.



(Leadership in Energy and Environmental Design) is a green certification program developed by the U.S. Green Building Council that recognizes sustainable, healthy and highly efficient building strategies and practices.

GEOTILES products are manufactured with a content of recycled material, free of VOCs, waterproof and with EPDs associated with the product that contribute to the satisfaction of the credits of the LEED® v4 certification.

For more information: <https://www.usgbc.org/leed>

Leadership in Energy and Environmental Design es un programa de certificación ecológica desarrollada por el U.S. Green Building Council que reconoce estrategias y prácticas de construcción sostenible, saludables y altamente eficientes.

Los productos de GEOTILES se fabrican con un contenido de material reciclado, libres de COVs, impermeables y con EPDs asociadas al producto que contribuyen a la satisfacción de los créditos de la certificación LEED® v4. Para mayor información: <https://www.usgbc.org/leed>



FloorScore® is the most recognized Indoor Air Quality Certification (IAQ) standard for hard surface flooring materials, adhesives, and flooring. Developed by SCS with the Resilient Floor Covering Institute (RFCI), a trade association for the flooring manufacturer and supplier industry, it qualifies for many green building schemes.

Resultado de imagen de floorscoreFloorScore® es la norma de certificación de calidad del aire interior (IAQ) más reconocida para materiales, adhesivos y contra suelos para suelos de superficie dura. Desarrollado por SCS con el Resilient Floor Covering Institute (RFCI), una asociación comercial para la industria de fabricantes y proveedores de suelos, califica para muchos esquemas de construcción ecológica.



Our products have been evaluated by carrying out a life cycle analysis, from the extraction of raw materials, through production; to the recovery of construction and demolition waste. This analysis has been carried out according to the international standards of the ISO 14040 series and has been published in the EPD environmental product declaration (ISO 14025) certified by AENOR.

Nuestros productos han sido evaluados mediante la realización de un análisis de ciclo de vida, desde la extracción de materias primas, pasando por producción; hasta la valorización de los residuos de la construcción y demolición. Este análisis se ha realizado acorde a las normas internacionales de la serie ISO 14040 y han sido publicados en la declaración ambiental de producto EPD (ISO 14025) certificadas por AENOR.



Self-declarations of the minimum % content of pre-consumer recycled material content have been made in accordance with ISO 14021-Self-declared environmental claims (Type II environmental labelling). Mediante la norma ISO 14021-Afirmaciones ambientales auto declaradas (Etiquetado ambiental tipo II) se han conformado autodeclaraciones de % de contenido mínimo de materia reciclada en pre-consumo.



French certification for products that defines the conformity of the final product with the QB-32 and cahier 3778 standards of NF-UPEC regarding the technical characteristics according to the usability and purpose of the product.

Certificación francesa para productos que define la conformidad del producto final con las normas QB-32 y cahier 3778 de NF-UPEC respecto a las características técnicas acorde a la usabilidad y finalidad del producto.

geotiles
cerámica

GEOTILES, S.L.U.
Carretera Vila-real - Onda, Km.6
Apdo Correos 116
12540 Vila-real (Castellón) SPAIN
Tel.: +34 964 522 700
www.geotiles.com